





Air gripper—HFC Series

Parallel open/close style

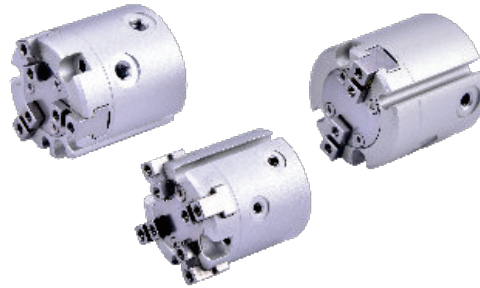

Ordering code

HFC Y 20

① ② ③



① Model

HFC: Air finger
(Double acting, parallel type)

② Finger type

I: Two grippers

Y: Three grippers




③ Bore size

16 20 25 32 40 50 63

HFC series are all attached with magnet.

X: Four grippers



Specification

Bore size (mm)	16	20	25	32	40	50	63
Acting type	Double acting						
Fluid	Air(to be filtered by 40μm filter element)						
Operating pressure	28~100psi(0.2~0.7MPa)			22~100psi(0.15~0.7MPa)			
Temperature	-10~60℃						
Lubrication	Not required						
Repeatability mm	±0.01						
Max. frequency	120(c.p.m)				60(c.p.m)		
Sensor switches	CM5H / DMSH(S)						
Port size	M3×0.5			M5×0.8			

[Note] Sensor switch should be ordered additionally.

Product feature

1. Uniform block is adopted in the interior of the air gripper to afford larger gripper force.
2. The bumper is adopted in the front of piston, which can reduce the noise of metal bump.
3. A positioning hole is attached to the bottom of the body, which can improve the precision and the consistency of repeated dismounting and positioning.
4. Precision repeating snatch which adopted roboticized equipment.
5. Kinds of series and styles for you to choice which snatch multiform workpiece.



Gripping force and stroke

Model	Gripping force per finger Effective valve(N)		Opening/Closing stroke (Both sides)(mm)	
	Internal	External		
2 grippers	HFCI16	23	21	4
	HFCI20	42	37	4
	HFCI25	71	63	6
	HFCI32	123	111	8
	HFCI40	195	177	8
	HFCI50	306	280	12
	HFCI63	537	502	16
3 grippers	HFCY16	16	14	4
	HFCY20	28	25	4
	HFCY25	47	42	6
	HFCY32	82	74	8
	HFCY40	130	118	8
	HFCY50	204	187	12
	HFCY63	359	335	16
4 grippers	HFCX16	12	10	4
	HFCX20	21	19	4
	HFCX25	35	31	6
	HFCX32	61	55	8
	HFCX40	97	88	8
	HFCX50	153	140	12
	HFCX63	268	251	16

Note) The gripping force in the above table is in the working pressure of 75psi, and with a gripping point of L=20mm(Φ16~Φ25) or L=30mm(Φ32~Φ63).
Add) Please refer to page 361 for the definition of "L".

How to select product

Please select pneumatic finger according to the following steps:


① The selection of the effective gripping force



② the confirmation of the gripping point

1. The selection of the gripping force

The gripping work-pieces shown below, on the impact condition of ordinary handling state, taking safety coefficient a=4, have a gripping force that is more than 10-20 times of the mass of the gripped objects.

	The work-pieces as shown in the left :		μ=0.2	μ=0.1
	n: number of gripper F: Gripping force (N) μ: friction coefficient between fittings and work-pieces. m: mass of work-pieces g: acceleration of gravity (=9.8m/s ²)	The condition that the work-pieces won't drop is: $n \times \mu F > mg$ so: $F > \frac{mg}{n \times \mu}$ Safety coefficient is a, so F is: $F = \frac{mg}{n \times \mu} \times a$	$F = \frac{mg}{2 \times 0.2} \times 4 = 10 \times mg$ 10 times of the mass of the gripped objects	$F = \frac{mg}{2 \times 0.1} \times 4 = 20 \times mg$ 20 times of the mass of the gripped objects

Note) If the friction coefficient $\mu > 0.2$, for safety, please also select clamping force according to the principle of 10~20 times of the mass of the clamped objects. As for large acceleration and shock, it requires for greater safety coefficient.

1.1) The actual gripping force must be within the effective gripping forces of different pneumatic fingers specifications shown in the below chart.


Air gripper(parallel open/close style)




HFC Series

Bore size: $\Phi 16$, $\Phi 20$, $\Phi 25$, $\Phi 32$, $\Phi 40$, $\Phi 50$, $\Phi 63$


Opened gripping force(I Type)




HFCI16




HFCI20




HFCI25

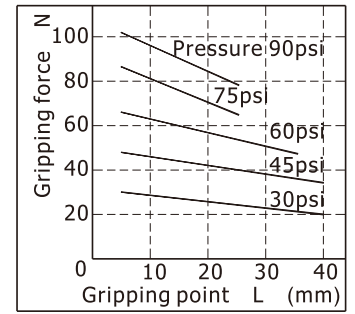


HFCI32




HFCI50




HFCI40




HFCI63

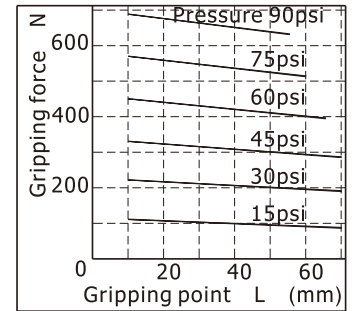


Closed gripping force(I Type)




HFCI16

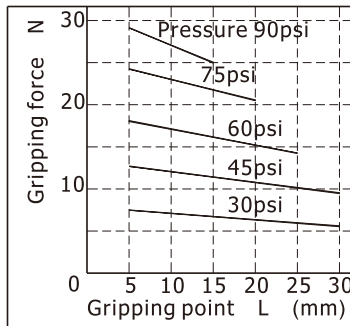


HFCI20

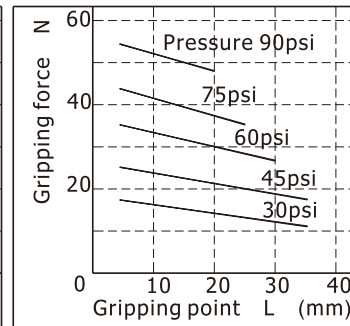


HFCI25

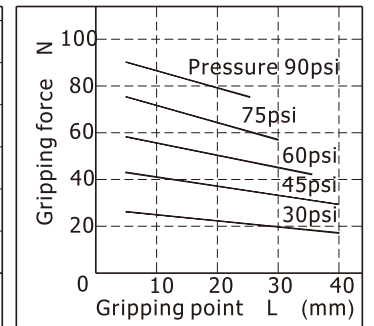


HFCI32




HFCI40

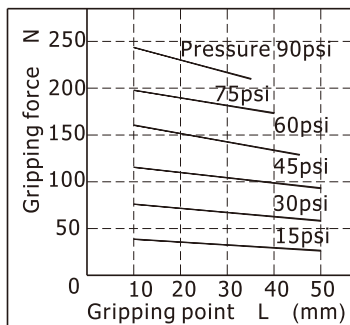

HFCI50

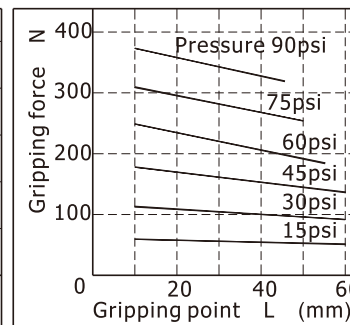

HFCI63

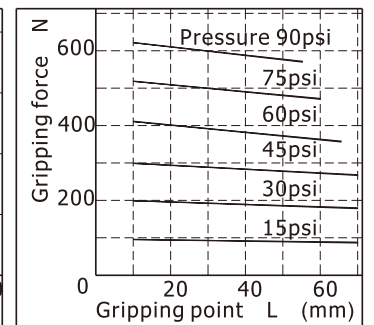


Air gripper(parallel open/close style)




HFC Series

Bore size: $\Phi 16$, $\Phi 20$, $\Phi 25$, $\Phi 32$, $\Phi 40$, $\Phi 50$, $\Phi 63$


Opened gripping force(Y Type)




HFCY16

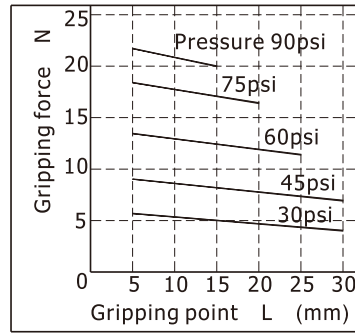


HFCY20

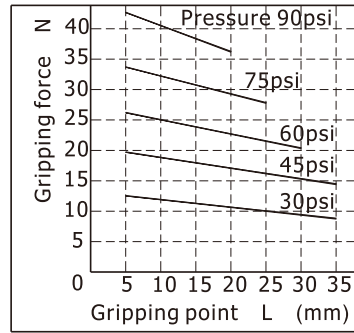


HFCY25

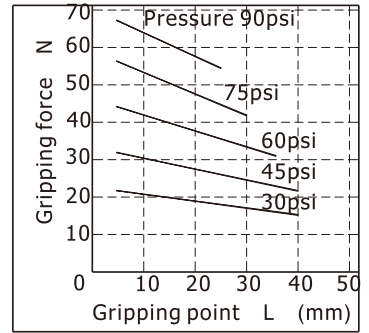


HFCY32

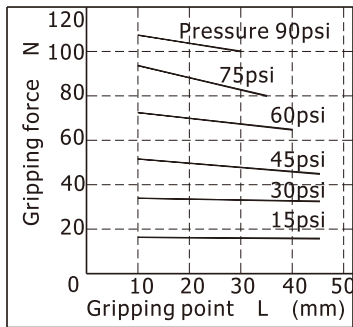


HFCY40

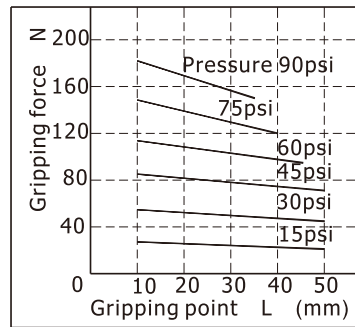


HFCY50

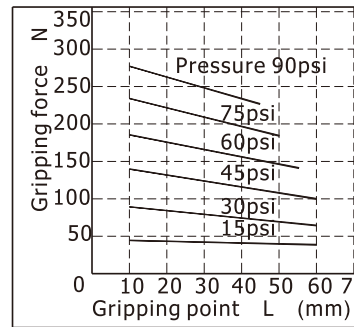


HFCY63

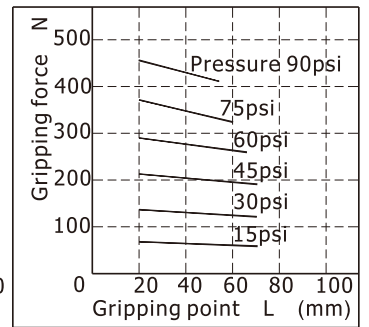


Closed gripping force(Y Type)




HFCY16

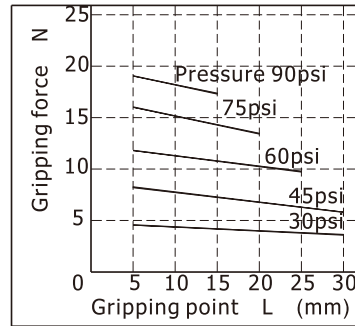


HFCY20

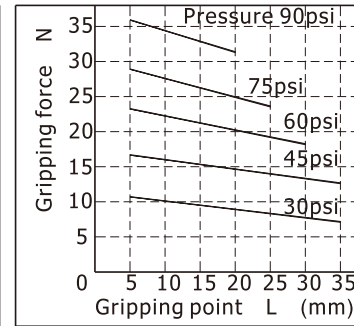


HFCY25

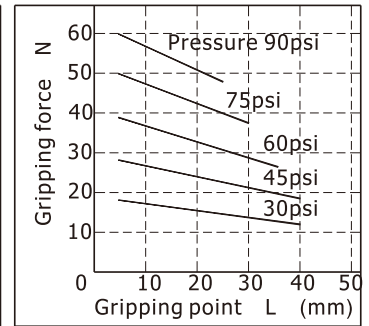


HFCY32

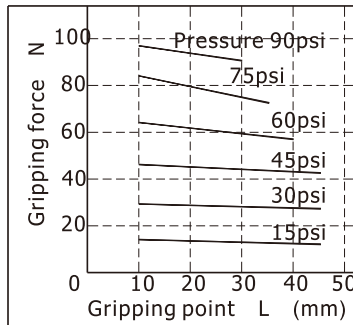


HFCY40

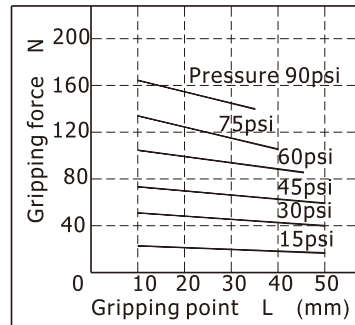

HFCY50

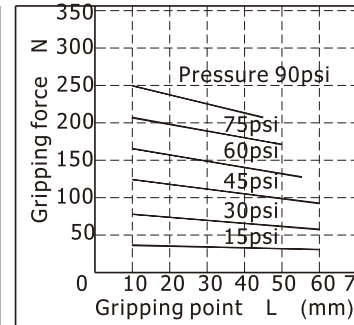

HFCY63

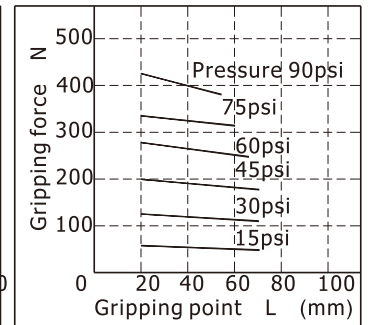


Air gripper(parallel open/close style)


HFC Series

Bore size: $\Phi 16$, $\Phi 20$, $\Phi 25$, $\Phi 32$, $\Phi 40$, $\Phi 50$, $\Phi 63$


Opened gripping force(X Type)




HFCX16

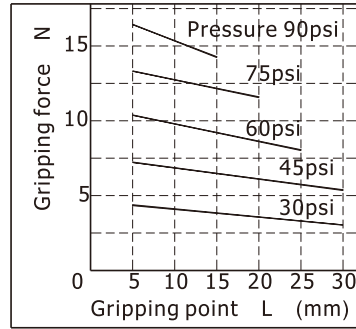


HFCX20

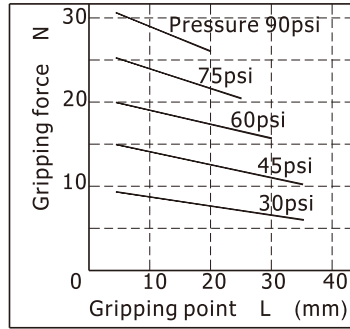


HFCX25

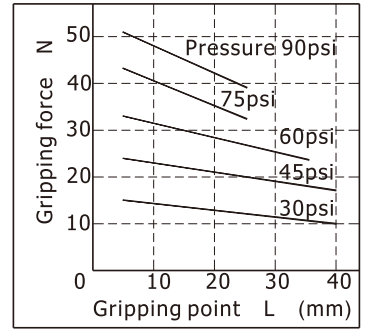


HFCX32




HFCX40

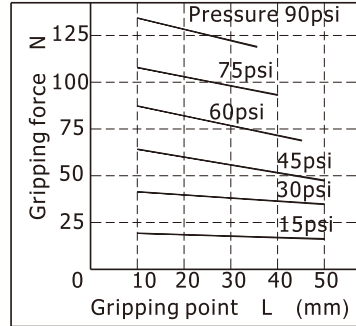


HFCX50

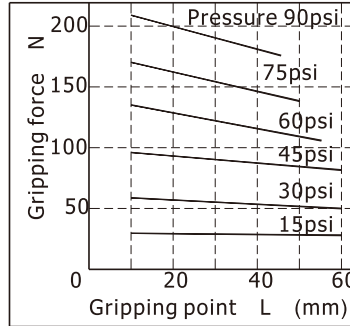


HFCX63

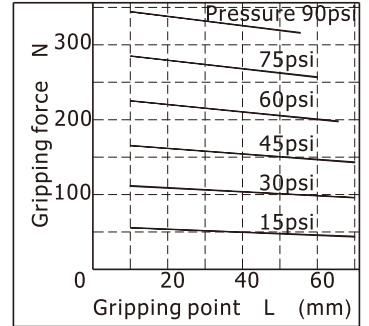


Closed gripping force(X Type)




HFCX16

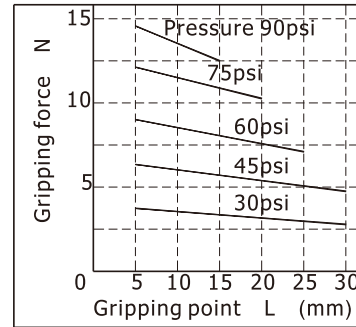


HFCX20

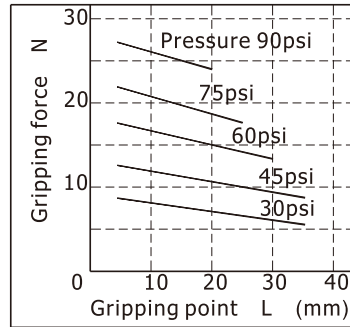


HFCX25

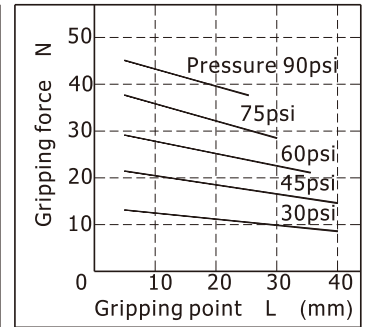


HFCX32




HFCX40

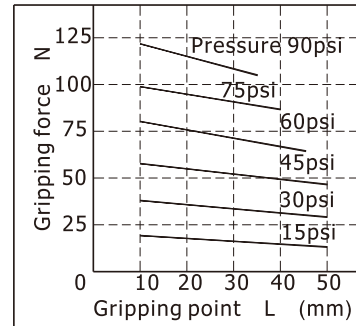

HFCX50

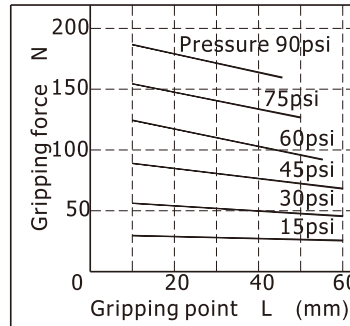

HFCX63

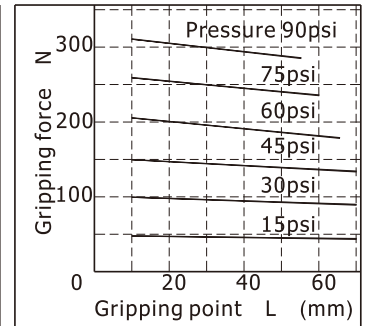

Air gripper(parallel open/close style)

AIRTAC


HFC Series

Bore size: Φ16, Φ20, Φ25, Φ32, Φ40, Φ50, Φ63

Installation and application


1. Due to the abrupt changes, the circuit pressure is low, which will lead to the decrease of the gripping force and falling of the work-pieces. In order to avoid the harm to the human body and damage to the equipment, anti-dropping device must be equipped.
2. Don't use the air gripper under strong external force and impact force.
3. When install and fix the air gripper, avoid falling down, collision and damage.
4. When fixing the gripping jaw parts, don't twist the gripping jaw.
5. There are several kinds of installation method, and the locking torque of fastening screw must be within the prescribed torque range shown in the below chart. If the locking torque is too large, it will cause the dysfunctional. If the locking torque is too small, it will cause the position deviation and fall.

Tail installation type



Model	Bore size	The bolts type	Max. locking moment(Nm)	Max. screwed depth(mm)	The aperture of the positioning bore(mm)	The depth of the positioning bore(mm)
HFCI HFCX	16	M4×0.7	2.1	8	Φ17 ^{+0.05} ₀	1.5
	20	M4×0.7	2.1	8	Φ21 ^{+0.05} ₀	1.5
	25	M4×0.7	2.1	8	Φ26 ^{+0.05} ₀	1.5
	32	M5×0.8	4.3	10	Φ34 ^{+0.05} ₀	2
	40	M6×1.0	7.3	12	Φ42 ^{+0.05} ₀	2
	50	M6×1.0	7.3	12	Φ52 ^{+0.05} ₀	2
HFCY	63	M6×1.0	7.3	12	Φ65 ^{+0.05} ₀	2.5
	16	M3×0.5	0.88	6	Φ17 ^{+0.05} ₀	1.5
	20	M3×0.5	0.88	6	Φ21 ^{+0.05} ₀	1.5
	25	M4×0.7	2.1	8	Φ26 ^{+0.05} ₀	1.5
	32	M4×0.7	2.1	8	Φ34 ^{+0.05} ₀	2
	40	M5×0.8	4.3	10	Φ42 ^{+0.05} ₀	2
50	M5×0.8	4.3	10	Φ52 ^{+0.05} ₀	2	
63	M6×1.0	7.3	12	Φ65 ^{+0.05} ₀	2.5	

The installation of the front through hole




Model	Bore size	The bolts type	Max. locking moment(Nm)
HFCI HFCX	16	M3×0.5	0.88
	20	M3×0.5	0.88
	25	M3×0.5	0.88
	32	M4×0.7	2.1
	40	M5×0.8	4.3
	50	M5×0.8	4.3
HFCY	63	M5×0.8	4.3
	16	M3×0.5	0.88
	20	M3×0.5	0.88
	25	M4×0.7	2.1
	32	M4×0.7	2.1
	40	M5×0.8	4.3
50	M5×0.8	4.3	
63	M6×1.0	7.3	

6. The installation method of the gripping jaw fittings

When install the gripping jaw fittings, you have to pay particular attention that you can only hold the gripping jaw by using spanner, and then lock the screws with allen wrench. Never clamp the body directly and then lock the screws, otherwise the parts will be easily damaged.

Install the gripping jaw fittings



Bore size	The bolts type	Max. locking moment(Nm)
16	M3×0.5	0.59
20	M3×0.5	0.59
25	M3×0.5	0.59
32	M4×0.7	1.4
40	M4×0.7	1.4
50	M5×0.8	2.8
63	M5×0.8	2.8

Air gripper(parallel open/close style)

AIRTAC


HFC Series

Bore size: $\Phi 16$, $\Phi 20$, $\Phi 25$, $\Phi 32$, $\Phi 40$, $\Phi 50$, $\Phi 63$

Dimensions

Two grippers

$\Phi 16 \sim \Phi 25$

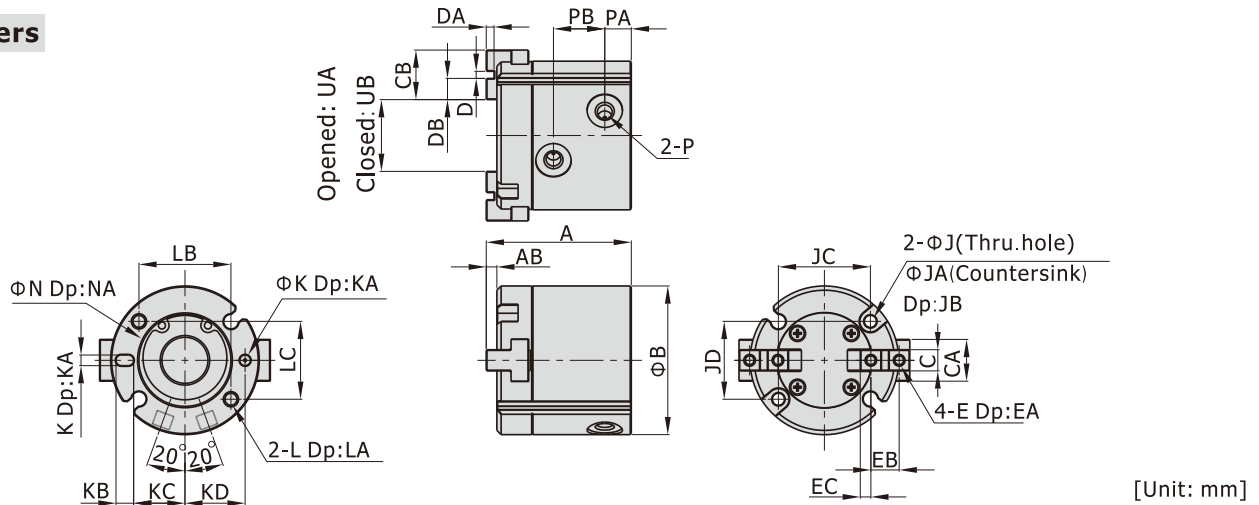


[Unit: mm]

Model/Item	A	AB	B	C	CA	CB	D	DA	DB	E	EA	EB	EC	J	JA	JB	JC	JD
HFCI16	35	3	30	5 ^{-0.01/-0.03}	8	10	2 ^{+0.04/+0.01}	2 ^{+0.2/0}	4	M3×0.5	5	6	2	3.4	6	6	18	16
HFCI20	39	3	36	6 ^{-0.01/-0.03}	10	12	2 ^{+0.04/+0.01}	2 ^{+0.2/0}	5	M3×0.5	5	7	2.5	3.4	6	6	24	18
HFCI25	41	3	42	6 ^{-0.01/-0.03}	12	14	2 ^{+0.04/+0.01}	2 ^{+0.2/0}	6	M3×0.5	5	8	3	3.4	6	6	26	22

Model/Item	K	KA	KB	KC	KD	L	LA	LB	LC	N	NA	P	PA	PB	UA	UB
HFCI16	2 ^{+0.04/+0.01}	2	3	11	12.5	M4×0.7	8	18	16	17 ^{+0.05/0}	1.5	M3×0.5	7	10	14	10
HFCI20	2 ^{+0.04/+0.01}	2	3	13	14.5	M4×0.7	8	24	18	21 ^{+0.05/0}	1.5	M5×0.8	7	13	16	12
HFCI25	3 ^{+0.04/+0.01}	3	5	14.5	17	M4×0.7	8	26	22	26 ^{+0.05/0}	1.5	M5×0.8	7.5	14.5	20	14

$\Phi 32 \sim \Phi 63$

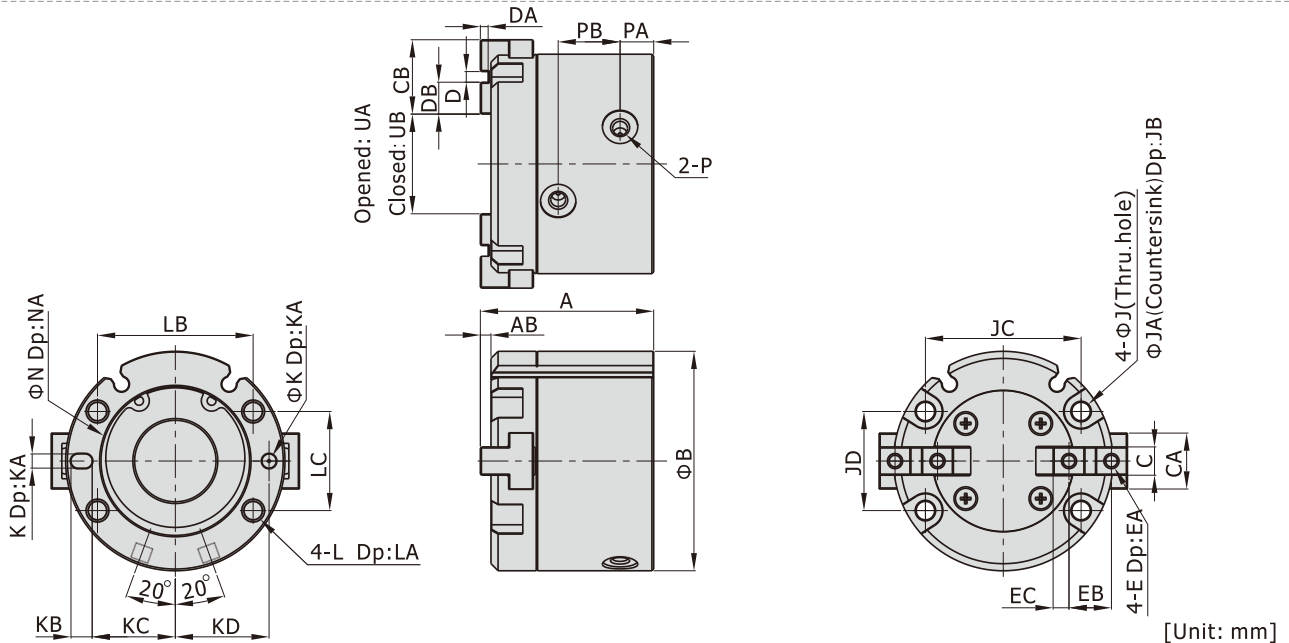

[Unit: mm]

Model/Item	A	AB	B	C	CA	CB	D	DA	DB	E	EA	EB	EC	J	JA	JB	JC	JD
HFCI32	45	3	55	8 ^{-0.01/-0.03}	14	20	2 ^{+0.04/+0.01}	2 ^{+0.2/0}	9	M4×0.7	8	11	4.5	4.2	8	9	38	25
HFCI40	49	3	62	8 ^{-0.01/-0.03}	16	21	3 ^{+0.04/+0.01}	2 ^{+0.2/0}	9	M4×0.7	8	12	4.5	5.2	9.5	9	44	28
HFCI50	57	3	70	10 ^{-0.01/-0.03}	18	24	4 ^{+0.04/+0.01}	2 ^{+0.2/0}	10	M5×0.8	9	14	5	5.2	9.5	12	52	34
HFCI63	68	4	86	12 ^{-0.01/-0.03}	24	28	6 ^{+0.04/+0.01}	3 ^{+0.2/0}	11	M5×0.8	9	17	5.5	5.2	9.5	14	66	38

Model/Item	K	KA	KB	KC	KD	L	LA	LB	LC	N	NA	P	PA	PB	UA	UB
HFCI32	3 ^{+0.04/+0.01}	3	5	20.5	23	M5×0.8	10	38	25	34 ^{+0.05/0}	2	M5×0.8	8.5	16	24	16
HFCI40	4 ^{+0.04/+0.01}	4	6	23.5	26.5	M6×1.0	12	44	28	42 ^{+0.05/0}	2	M5×0.8	9.5	17.5	28	20
HFCI50	4 ^{+0.04/+0.01}	4	6	28	31	M6×1.0	12	52	34	52 ^{+0.05/0}	2	M5×0.8	9.5	21	34	22
HFCI63	5 ^{+0.04/+0.01}	5	7	34.5	38	M6×1.0	12	66	38	65 ^{+0.05/0}	2.5	M5×0.8	12	24	46	30


Air gripper(parallel open/close style)

AIRTAC

HFC Series

Bore size: $\Phi 16, \Phi 20, \Phi 25, \Phi 32, \Phi 40, \Phi 50, \Phi 63$

Three grippers

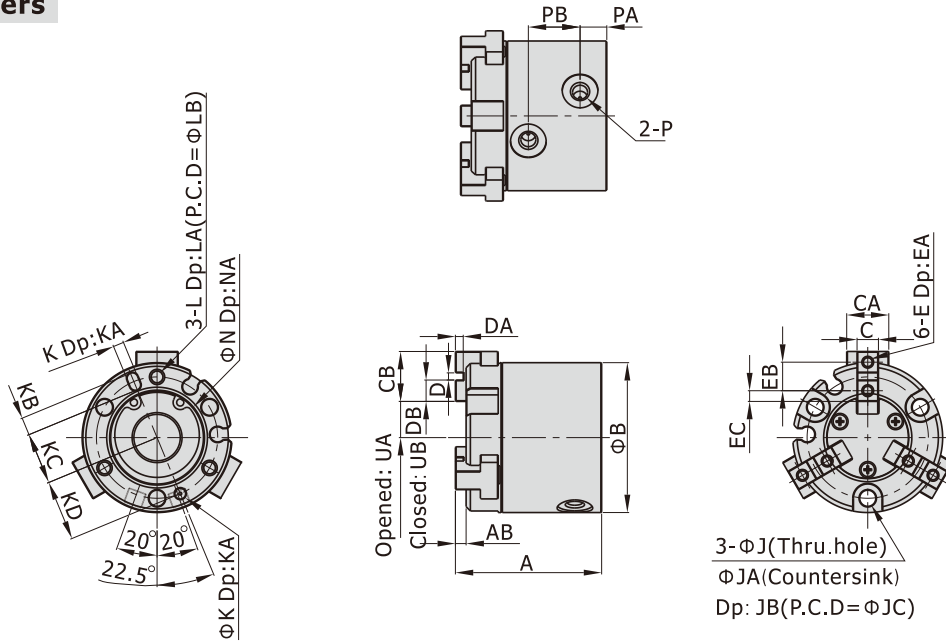

[Unit: mm]

Model\Item	A	AB	B	C	CA	CB	D	DA	DB	E	EA	EB	EC	J	JA	JB	JC
HFCY16	35	3	30	5 ^{-0.01} _{-0.03}	8	10	2 ^{+0.04} _{+0.01}	2 ^{+0.2} ₀	4	M3×0.5	5	6	2	3.4	6	6	25
HFCY20	39	3	36	6 ^{-0.01} _{-0.03}	10	12	2 ^{+0.04} _{+0.01}	2 ^{+0.2} ₀	5	M3×0.5	5	7	2.5	3.4	6	6	29
HFCY25	41	3	42	6 ^{-0.01} _{-0.03}	12	14	2 ^{+0.04} _{+0.01}	2 ^{+0.2} ₀	6	M3×0.5	5	8	3	4.5	8	9	34
HFCY32	45	3	52	8 ^{-0.01} _{-0.03}	14	20	2 ^{+0.04} _{+0.01}	2 ^{+0.2} ₀	9	M4×0.7	8	11	4.5	4.5	8	9	44
HFCY40	49	3	62	8 ^{-0.01} _{-0.03}	16	21	3 ^{+0.04} _{+0.01}	2 ^{+0.2} ₀	9	M4×0.7	8	12	4.5	5.5	9.5	9	53
HFCY50	57	3	70	10 ^{-0.01} _{-0.03}	18	24	4 ^{+0.04} _{+0.01}	2 ^{+0.2} ₀	10	M5×0.8	9	14	5	5.5	9.5	12	62
HFCY63	68	4	86	12 ^{-0.01} _{-0.03}	24	28	6 ^{+0.04} _{+0.01}	3 ^{+0.2} ₀	11	M5×0.8	9	17	5.5	6.6	11	14	76

Model\Item	K	KA	KB	KC	KD	L	LA	LB	N	NA	P	PA	PB	UA	UB
HFCY16	2 ^{+0.04} _{+0.01}	2	3	11	12.5	M3×0.5	6	25	17 ^{+0.05} ₀	1.5	M3×0.5	7	10	7	5
HFCY20	2 ^{+0.04} _{+0.01}	2	3	13	14.5	M3×0.5	6	29	21 ^{+0.05} ₀	1.5	M5×0.8	7	13	8	6
HFCY25	3 ^{+0.04} _{+0.01}	3	5	14.5	17	M4×0.7	8	34	26 ^{+0.05} ₀	1.5	M5×0.8	7.5	14.5	10	7
HFCY32	3 ^{+0.04} _{+0.01}	3	5	19.5	22	M4×0.7	8	44	34 ^{+0.05} ₀	2	M5×0.8	8.5	16	12	8
HFCY40	4 ^{+0.04} _{+0.01}	4	6	23.5	26.5	M5×0.8	10	53	42 ^{+0.05} ₀	2	M5×0.8	9.5	17.5	14	10
HFCY50	4 ^{+0.04} _{+0.01}	4	6	28	31	M5×0.8	10	62	52 ^{+0.05} ₀	2	M5×0.8	9.5	21	17	11
HFCY63	5 ^{+0.04} _{+0.01}	5	7	34.5	38	M6×1.0	12	76	65 ^{+0.05} ₀	2.5	M5×0.8	12	24	23	15

Air gripper(parallel open/close style)


AIRTAC

HFC Series

Bore size: $\Phi 16, \Phi 20, \Phi 25, \Phi 32, \Phi 40, \Phi 50, \Phi 63$

Four grippers

$\Phi 16 \sim \Phi 25$

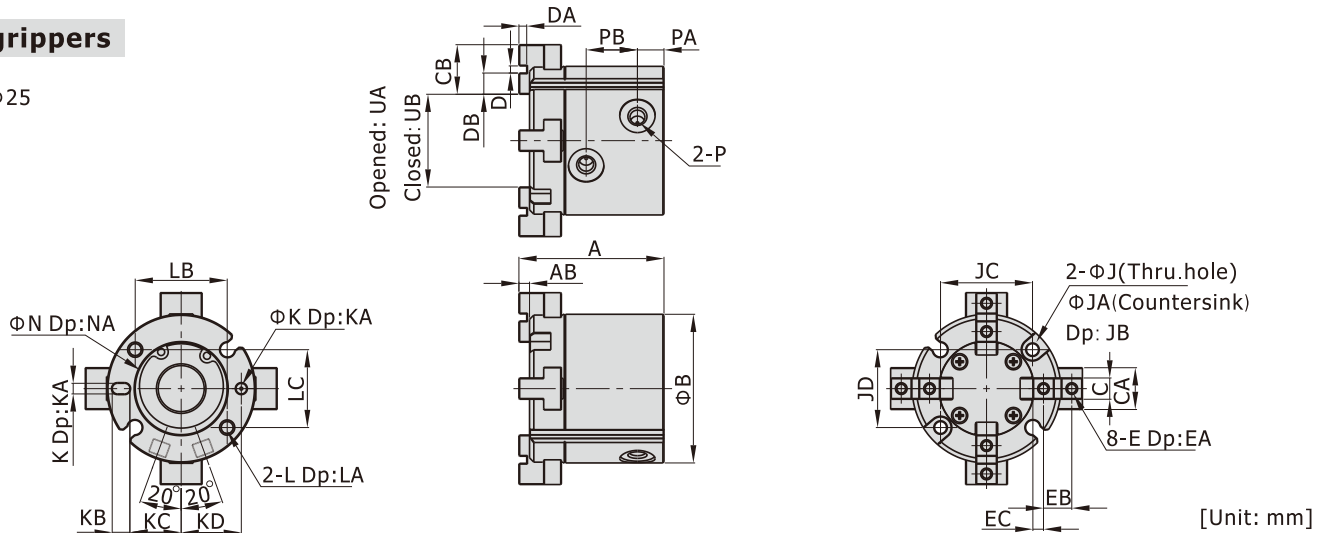


[Unit: mm]

Model\Item	A	AB	B	C	CA	CB	D	DA	DB	E	EA	EB	EC	J	JA	JB	JC	JD
HFCX16	35	3	30	5 ^{-0.01/-0.03}	8	10	2 ^{+0.04/+0.01}	2 ^{+0.2/0}	4	M3×0.5	5	6	2	3.4	6	6	18	16
HFCX20	39	3	36	6 ^{-0.01/-0.03}	10	12	2 ^{+0.04/+0.01}	2 ^{+0.2/0}	5	M3×0.5	5	7	2.5	3.4	6	6	24	18
HFCX25	41	3	42	6 ^{-0.01/-0.03}	12	14	2 ^{+0.04/+0.01}	2 ^{+0.2/0}	6	M3×0.5	5	8	3	3.4	6	6	26	22

Model\Item	K	KA	KB	KC	KD	L	LA	LB	LC	N	NA	P	PA	PB	UA	UB
HFCX16	2 ^{+0.05/0}	2	3	11	12.5	M4×0.7	8	18	16	17 ^{+0.05/0}	1.5	M3×0.5	7	10	17	13
HFCX20	2 ^{+0.05/0}	2	3	13	14.5	M4×0.7	8	24	18	21 ^{+0.05/0}	1.5	M5×0.8	7	13	19	15
HFCX25	3 ^{+0.05/0}	3	5	14.5	17	M4×0.7	8	26	22	26 ^{+0.05/0}	1.5	M5×0.8	7.5	14.5	26	20

$\Phi 32 \sim \Phi 63$

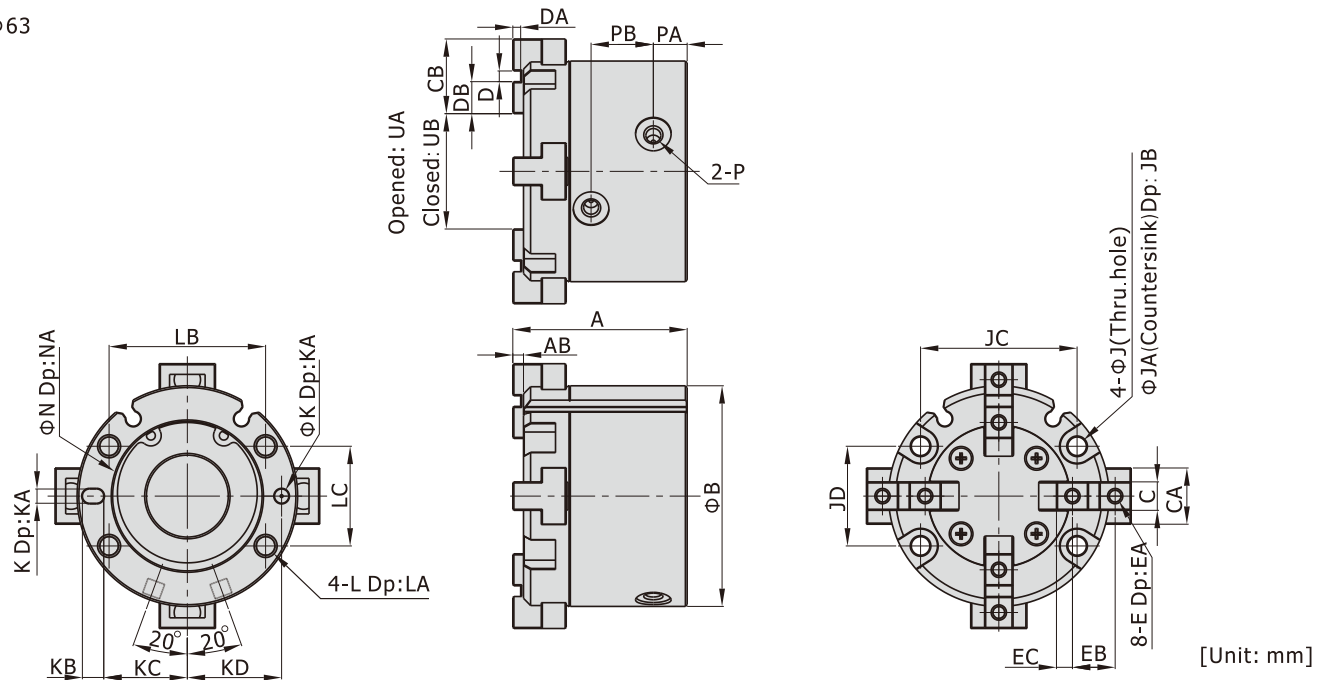

[Unit: mm]

Model\Item	A	AB	B	C	CA	CB	D	DA	DB	E	EA	EB	EC	J	JA	JB	JC	JD
HFCX32	45	3	55	8 ^{-0.01/-0.03}	14	20	2 ^{+0.04/+0.01}	2 ^{+0.2/0}	9	M4×0.7	8	11	4.5	4.2	8	9	38	25
HFCX40	49	3	62	8 ^{-0.01/-0.03}	16	21	3 ^{+0.04/+0.01}	2 ^{+0.2/0}	9	M4×0.7	8	12	4.5	5.2	9.5	9	44	28
HFCX50	57	3	70	10 ^{-0.01/-0.03}	18	24	4 ^{+0.04/+0.01}	2 ^{+0.2/0}	10	M5×0.8	9	14	5	5.2	9.5	12	52	34
HFCX63	68	4	86	12 ^{-0.01/-0.03}	24	28	6 ^{+0.04/+0.01}	3 ^{+0.2/0}	11	M5×0.8	9	17	5.5	5.2	9.5	14	66	38

Model\Item	K	KA	KB	KC	KD	L	LA	LB	LC	N	NA	P	PA	PB	UA	UB
HFCX32	3 ^{+0.04/+0.01}	3	5	20.5	23	M5×0.8	10	38	25	34 ^{+0.05/0}	2	M5×0.8	8.5	16	28	20
HFCX40	4 ^{+0.04/+0.01}	4	6	23.5	26.5	M6×1.0	12	44	28	42 ^{+0.05/0}	2	M5×0.8	9.5	17.5	32	24
HFCX50	4 ^{+0.04/+0.01}	4	6	28	31	M6×1.0	12	52	34	52 ^{+0.05/0}	2	M5×0.8	9.5	21	38	26
HFCX63	5 ^{+0.04/+0.01}	5	7	34.5	38	M6×1.0	12	66	38	65 ^{+0.05/0}	2.5	M5×0.8	12	24	51	35